


SP9PDF - Coax Stubs - 20m - Red

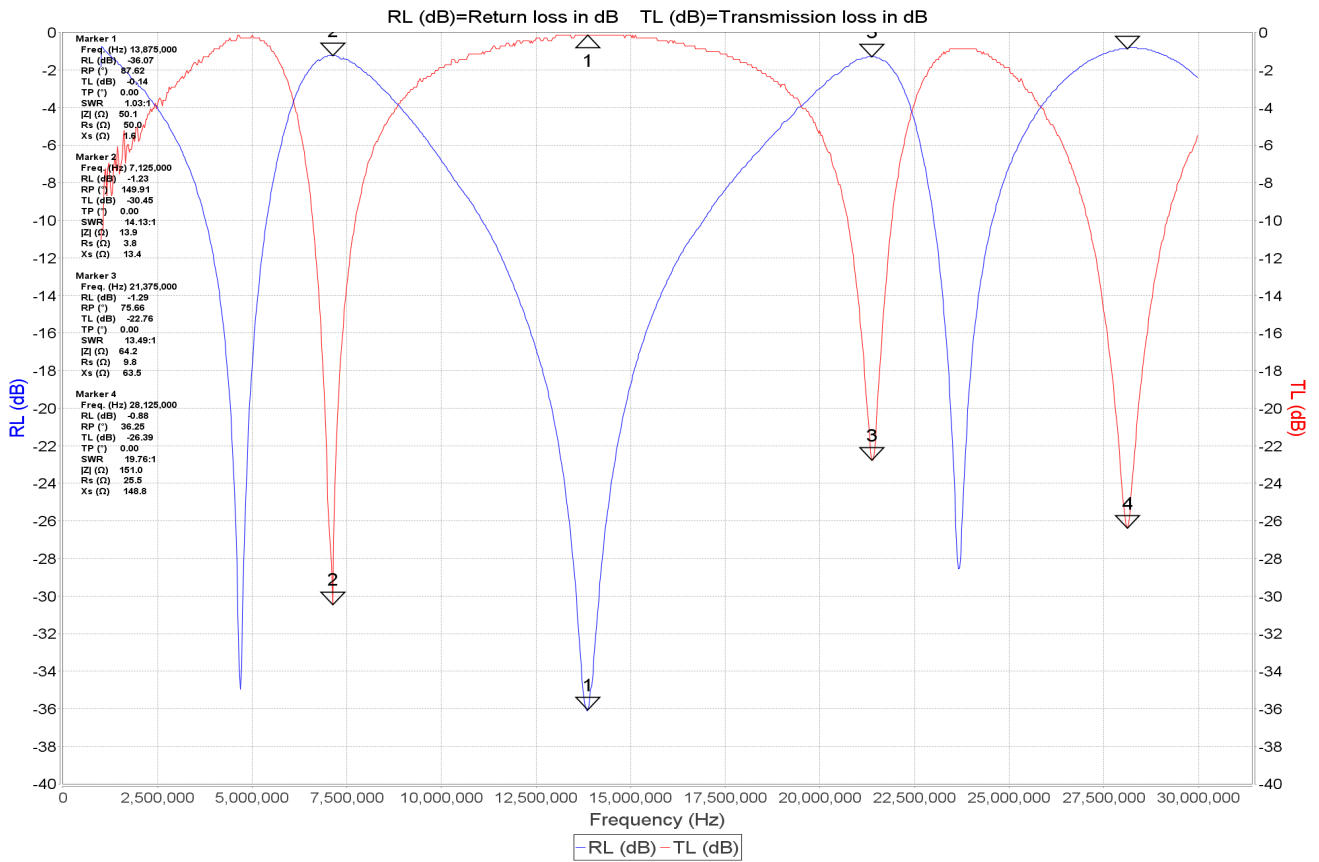

Marker	Freq. (Hz)	RL (dB)	RP (°)	TL (dB)	TP (°)	SWR	Z ()	Rs ()	Xs ()
1	13,875,000	-36.07	87.62	-0.14	0.00	1.03:1	50.1	50.0	1.6
2	7,125,000	-1.23	149.91	-30.45	0.00	14.13:1	13.9	3.8	13.4
1-2	6,750,000	34.84	62.29	30.30	0.00	---	36.2	46.2	11.8
3	21,375,000	-1.29	75.66	-22.76	0.00	13.49:1	64.2	9.8	63.5
4	28,125,000	-0.88	36.25	-26.39	0.00	19.76:1	151.0	25.5	148.8

Comment:

Coax:

- 80m - 1/4L 46ft. S
- 40m - 1/4L 23ft. S
- 1/2L 46ft. O
- 20m - 1/4L 11.5ft. S
- 1/2L 23ft. O
- 15m - 3x1/4L 23ft. S

Date: 5/3/13 11:38 PM

Analysar: MAX6

Scan

Freq: 1,000,000 / 30,000,000 MHz

Samples: 928

User: SQ9FK

